

Copeland™
brand products

Stream Series

Designed To Deliver Best-In-Class Performance



EMERSON™
Climate Technologies

Emerson Climate Technologies' **Stream** is a line of semi-hermetic 4 and 6 cylinder compressors. The Series provides best in class performance for today's HFC-based and uprising natural and low GWP refrigerants, significantly reducing cost of operation and environmental impact compared to competing products.

With advanced protection and diagnostics features for system reliability, reduced service costs and increased equipment uptime, the Stream series is built to last in today's modern changing world.

The Stream Series Features An Extended Model Line-Up...

- Range of 8 models from 62 to 153 m³/h for today's HFC refrigerants
- Availability with wide range of refrigerants: R134a, R407A, R407F, R404A and R407C
- Design readiness to be used with low GWP refrigerants like R448A, R449A, R450A and R513A
- Improved product range versus Discus: three additional models and two specific models with extended cooling capacity providing the best selection flexibility
- Range of 6 models for CO₂ transcritical and 6 models for CO₂ subcritical applications requiring high standstill pressures above 60Bar – see separate data sheet


... With Impressive Technical Highlights

- Best-in-class seasonal efficiencies, up to 15% higher than semi-hermetic reciprocating compressors known in the market
- Reduced sound level for quiet operation up to 7dBA
- Reduced dimensions and weight by up to 45 kg
- Wide operating envelope, one model fits all refrigeration applications, medium and low temperature
- Availability of 2 motor versions per displacement
- No cooling fan required for low temperature (0°C Suction Gas Return Temperature) to keep applied cost low
- Extremely low condensing temperatures for increased system efficiency
- Emerson CoreSense™ Diagnostics technology providing advanced protection & diagnostics to ensure long compressor lifetime
- Protection and sensing devices pre-installed to reduce applied system cost
- Current sensor allowing for individual compressor power monitoring to stay on top of energy costs
- Integrated status LEDs for local communication via colour and flash codes
- Remote communication via Modbus® for faster service
- For CoreSense Diagnostics see separate data sheet for full details
- Availability of the new demand cooling system for 4 and 6 cylinder Stream compressors to cover the low GWP refrigerant R407F for low temperature applications









All Stream compressors are released for two different options of capacity modulation:

- Variable speed release from 30 to 70 Hz for capacity modulation related energy savings
- Continuous modulation from 50–100% (4-cylinder) and 33–100% (6-cylinder) ensuring a perfect match of capacity to refrigeration load

Stream Line-up

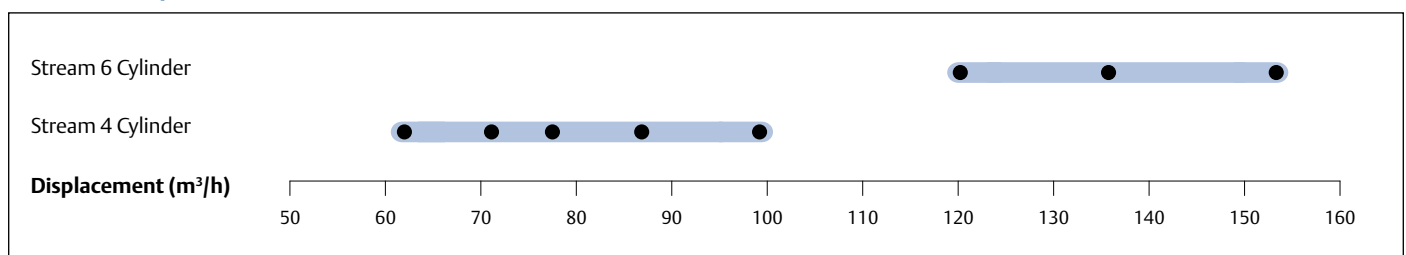

Operating Envelopes Stream Series

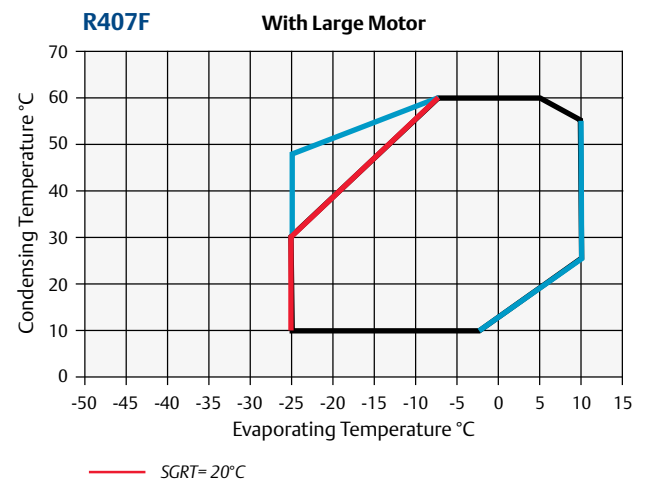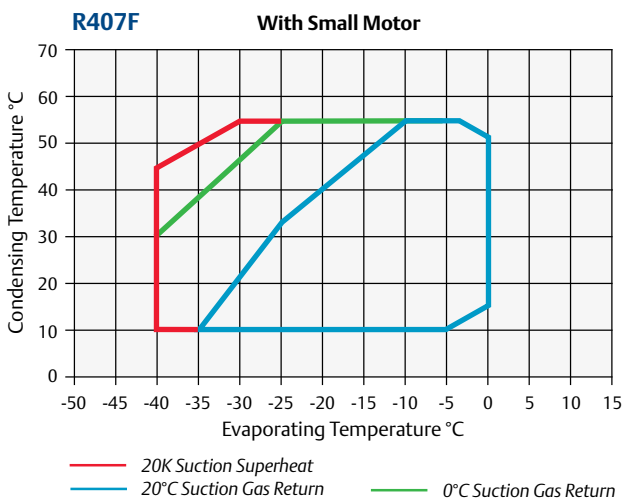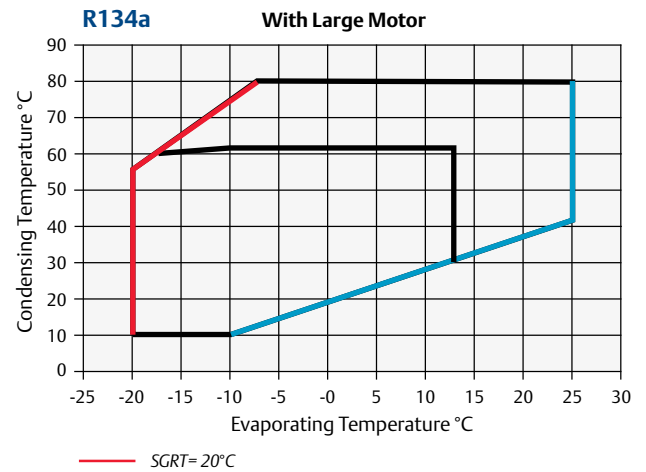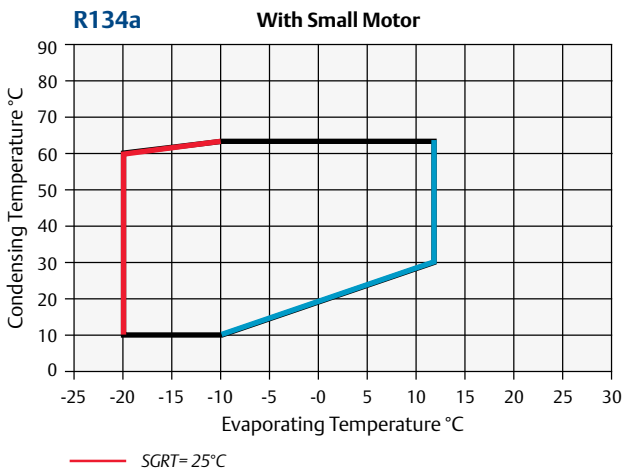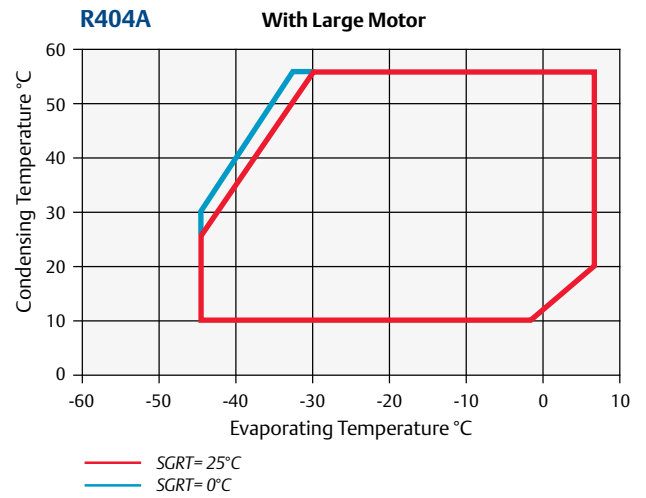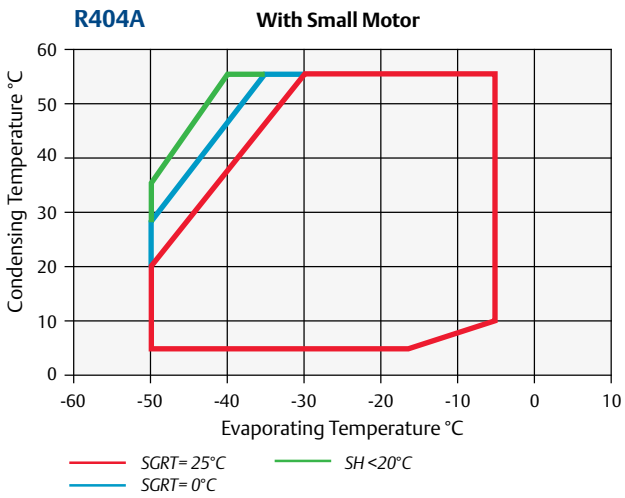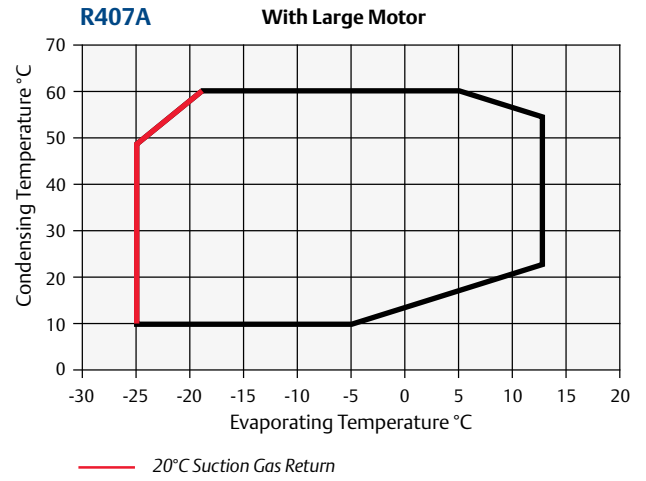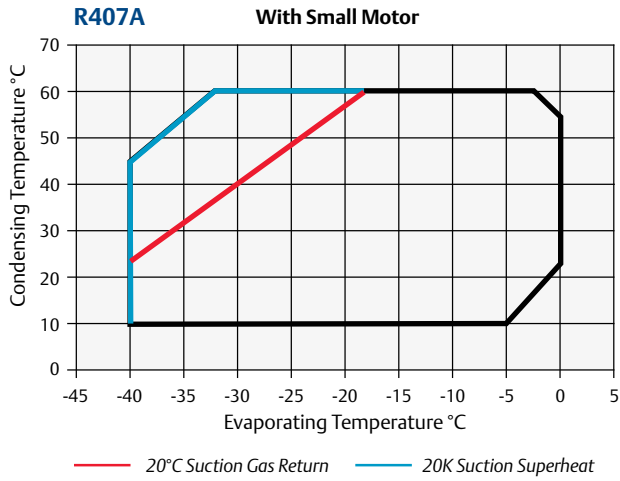



Technical Overview Stream

Model	Nominal Horsepower (hp)	Displacement (m ³ /h)	Medium Temperature								Low Temperature				Weight (kg)	Footprint (mm x mm)
			Cooling Capacity (kW)				COP				Cooling Capacity (kW)		COP			
			R404A*	R134a***	R407F*	R407A*	R404A*	R134a***	R407F*	R407A*	R404A**	R407F**	R404A**	R407F**		
4MF-13X	13	62	31.6	18.0	31.2	28.8	2.3	2.4	2.4	2.3	10.7	8.1	1.4	1.3	177	381 x 305
4MA-22X	22	62	32.7	18.7	32.3	30.1	2.4	2.4	2.5	2.5	10.5		1.4		177	
4ML-15X	15	71	38.4	21.8	37.5	34.9	2.3	2.4	2.4	2.4	13.3	10.0	1.5	1.3	180	
4MH-25X	25	71	38.5	21.5	37.6	35.3	2.4	2.4	2.5	2.4	12.4		1.4		187	
4MM-20X	17	78	42.0	24.1	40.6	38.7	2.3	2.4	2.4	2.4	15.1	11.3	1.5	1.3	182	
4MI-30X	27	78	42.8	23.8	41.4	38.6	2.4	2.4	2.5	2.4	14.4		1.5		188	
4MT-22X	22	88	47.6	27.4	46.1	41.5	2.3	2.4	2.4	2.4	17.0	12.9	1.5	1.3	183	
4MJ-33X	33	88	47.6	26.6	46.1	43.4	2.4	2.4	2.4	2.2	16.2		1.5		190	
4MU-25X	25	99	53.1	30.2	51.2	47.2	2.3	2.4	2.3	2.3	18.6	14.1	1.4	1.3	186	
4MK-35X	32	99	53.5	29.8	51.6	48.8	2.3	2.4	2.4	2.4	18.3		1.4		202	
6MM-30X	27	120	64.2	36.4	63.0	57.5	2.3	2.4	2.4	2.4	22.7	17.6	1.4	1.3	215	
6MI-40X	35	120	64.6	35.0	63.4	59.7	2.3	2.3	2.5	2.3	21.9		1.4		219	
6MT-35X	32	135	72.4	41.1	68.8	66.0	2.3	2.4	2.4	2.4	25.6	19.9	1.5	1.3	221	
6MJ-45X	40	135	72.4	39.7	70.1	66.3	2.3	2.4	2.4	2.3	24.3		1.5		223	
6MU-40X	40	153	81.4	44.9	77.1	73.1	2.3	2.3	2.3	2.3	28.4	20.3	1.4	1.2	225	
6MK-50X	50	153	80.9	42.5	79.1	74.0	2.3	2.2	2.4	2.4	27.3		1.4		230	

* Evaporating -10°C, Condensing 45°C, Suction Gas Return 20°C, Subcooling 0K

** Evaporating -35°C, Condensing 40°C, Suction Gas Return 0°C, Subcooling 0K

*** Evaporating -10°C, Condensing 45°C, Superheat 10K, Subcooling 0K

Available only for models with Demand cooling system, with DC in the model nomenclature

For more details, see www.emersonclimate.eu

Emerson Climate Technologies - European Headquarters - Pascalstrasse 65 - 52076 Aachen, Germany
Tel. +49 (0) 2408 929 0 - Fax: +49 (0) 2408 929 570 - Internet: www.emersonclimate.eu

The Emerson Climate Technologies logo is a trademark and service mark of Emerson Electric Co. Emerson Climate Technologies Inc. is a subsidiary of Emerson Electric Co. Copeland is a registered trademark and Copeland Scroll is a trademark of Emerson Climate Technologies Inc.. All other trademarks are property of their respective owners. Emerson Climate Technologies GmbH shall not be liable for errors in the stated capacities, dimensions, etc., as well as typographic errors. Products, specifications, designs and technical data contained in this document are subject to modification by us without prior notice. Illustrations are not binding.
© 2014 Emerson Climate Technologies, Inc.



EMERSON. CONSIDER IT SOLVED.™